



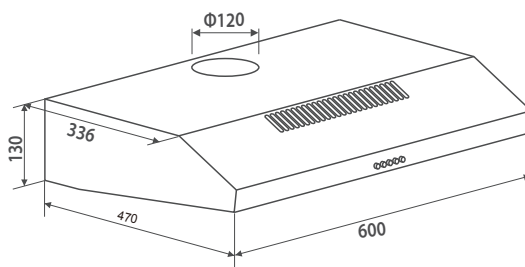

CSD6MXGG

60CM HOOD

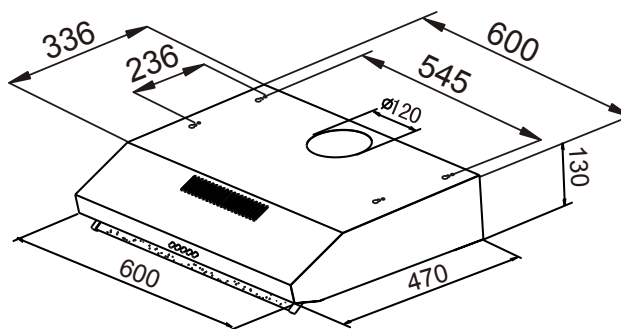

Model Name	CSD6MXGG
Product Code	36901735
EAN code	8059019043838
Brand	CANDY
FEATURES	
Dimensions (cm)	60
Finish/Color	430#SS
Voltage	220-240 V AC
Frequency	50HZ
Motor (number x power)	1 x 45W
Lighting (number x power - type)	1 x 4W LED LAMP
Total power	49W
Controls	Push Button
Speed levels	3
ENERGY DATAS	
EEl - Energy Efficiency Index (Class - Value)	69.4/B
AEC - Annual Energy Consumption (kWh/a)	27
FDE - Fluid Dynamic Efficiency (Class - Value)	8.9/E
LE - Lighting Efficiency (Class - Value)	15/D
GFE - Grease Filter Efficiency (Class - Value)	56.8/E
RU - Noise level (dB)	61
Min air flow in normal use QMIN (m3/h)	112.3
Max air flow in normal use QMAX (m3/h)	204.6
Measured air flow rate at best efficiency point QBEP (m3/h)	105.3
Measured air pressure at best efficiency point PBEP (PA)	118
A-weighted Sound Power Emission EN60704 at minimum speed DBMIN (dBa)	45
A-weighted Sound Power Emission EN60704 at maximum speed DBMAX (dBa)	61
Measured electric power input at best efficiency point WBEP (W)	38.9
Power consumption off mode PO (W)	0
Nominal power of the lighting system WL (W)	1x4W
Average illumination of the lighting system on the cooking surface EMIDDLE (lux)	60
Time increase factor f	1.7
Air flow EN61591 1st speed (ducted /recirculating) m3/h	112.3/78.6
Air flow EN61591 2nd speed (ducted /recirculating) m3/h	134.7/94.3
Air flow EN61591 3rd speed (ducted /recirculating) m3/h	204.6/143
Noise level sound pressure EN60704 1st speed (ducted - recirculating) dBa	35/40
Noise level sound pressure EN60704 2nd speed (ducted - recirculating) dBa	39/44
Noise level sound pressure EN60704 3rd speed (ducted - recirculating) dBa	51/57
Max noise level EN60704 (ducted / recirculating) dBa	61/63
ACCESSORIES	
Filters antigrease (number x type)	2 x Alu
Carbon filters (code / description / pcs x pack)	010800044/rounded cartridge/1pcs x pack
Carbon filters (included / optional)	Included
Air outlet (mm)	120
Reduction (mm)	No
Wire length	1.5m
Plug type	No plug
OTHERS	
User Manual Languages	EN/AR
Product dimensions (mm)	600x470x130mm
Packaging dimensions (mm)	638X165X515
Net weight (Kg)	4.7
Gross weight (Kg)	5.5